


SELCOM® CAR DOOR

# HydraPLUS



EXCELLENCE IN COMPONENTS

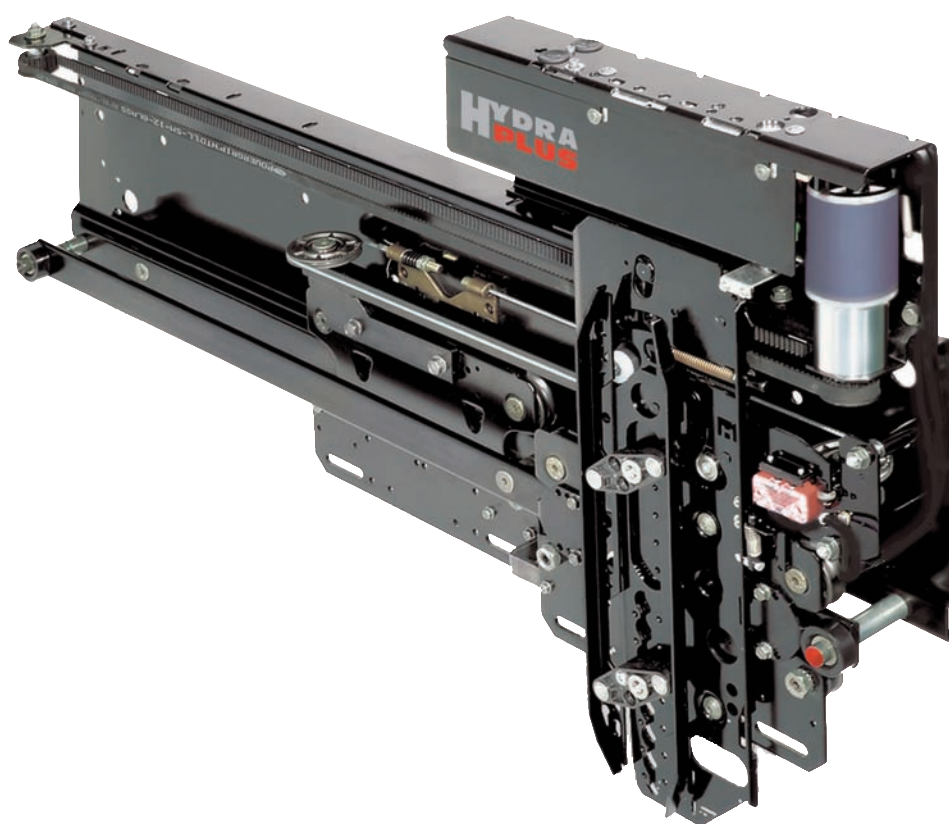














HydraPLUS, flexible and reliable.

- New coupler with integrated car door lock
- Pre-adjusted & tested for fast & easy installation
- High speed operation with Eco/Midi/Supra drives
- 127/230V - 50/60Hz Power input with high tolerance
- 24V DC Power output for safety devices
- Continuous door weight detection
- Open force limitation
- Easy speed selection
- Optional settings for special purposes

## SELCOM® CAR DOOR

# HydraPLUS

## PRODUCTION RANGE

POS.	SERIE	LANDING DOORS		CAR DOORS		C.O. mm		C.H. mm	
		TYPE	ILLUSTRATION	TYPE	ILLUSTRATION	Min.	Max.	Min.	Max.
DOOR WITH OPERATOR ABOVE	3201	01/C		02/C		600	1800	1900	NOTE: MAXIMUM CLEAR OPENING HEIGHT 3500 mm. - SUBJECT TO CLEAR OPENING WIDTH
		11/R		12/R		600	1800		
		11/L		12/L		600	1800		
		31/R		32/R		600	2100		
		31/L		32/L		600	2100		
		31/R		35/R		600	1400		
		31/L		35/L		600	1400		
		41/C		42/C		1200	3200		
		43/R		44/R		600	1150		
		61/C		62/C		1500	3200		
		65/R		66/R		900	1450		
		71/R		72/R		600	1400		
		71/L		72/L		600	1400		